



TRADITIONAL RISER TOP O-RING REPLACEMENT

Kitchen Faucet Model #s 4100-12, 4100-18, 4200

Prep Faucet Model #s 4700, 4800




Turn off water supply.

REQUIRED TOOLS:




Small Standard Screwdriver

1.




Unscrew riser cap (A) by hand and remove from riser top (B).

2.

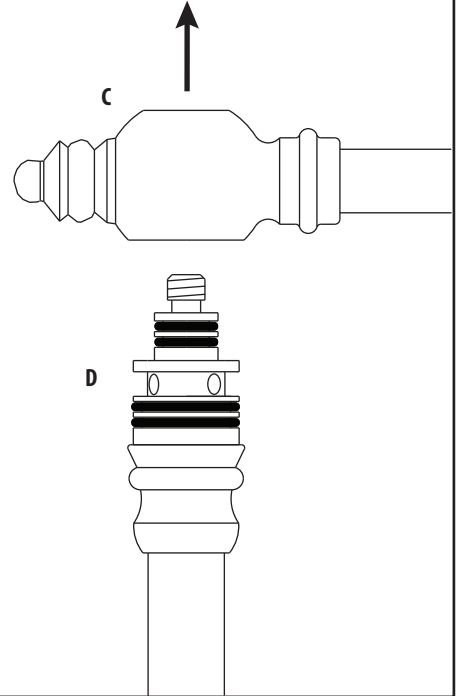


Slide faucet spout (C) straight up and off of riser top (D).

3.

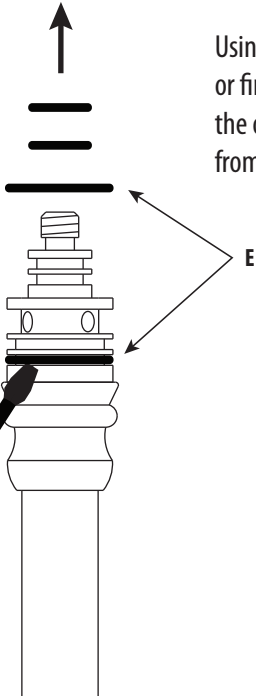

Using a small screwdriver or finger nail, gently pry the old O-rings (E) off from the riser top.

4.

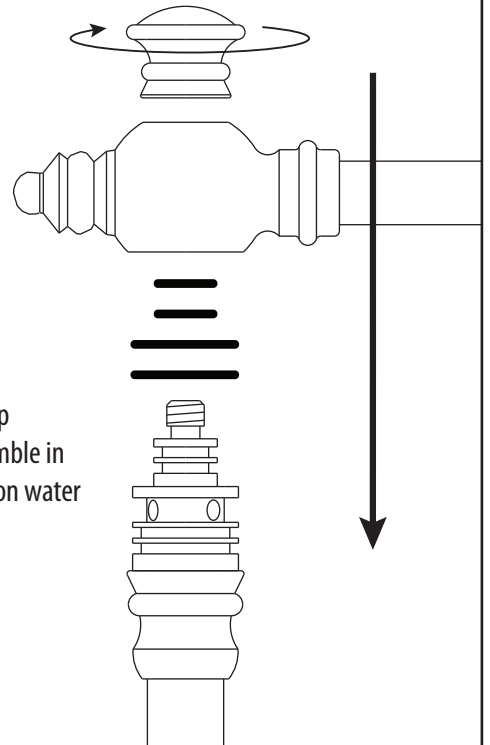

Replace the riser top O-rings and reassemble in reverse order. Turn on water and check for leaks.