


# THE WHEEL PULLDOWN FAUCET

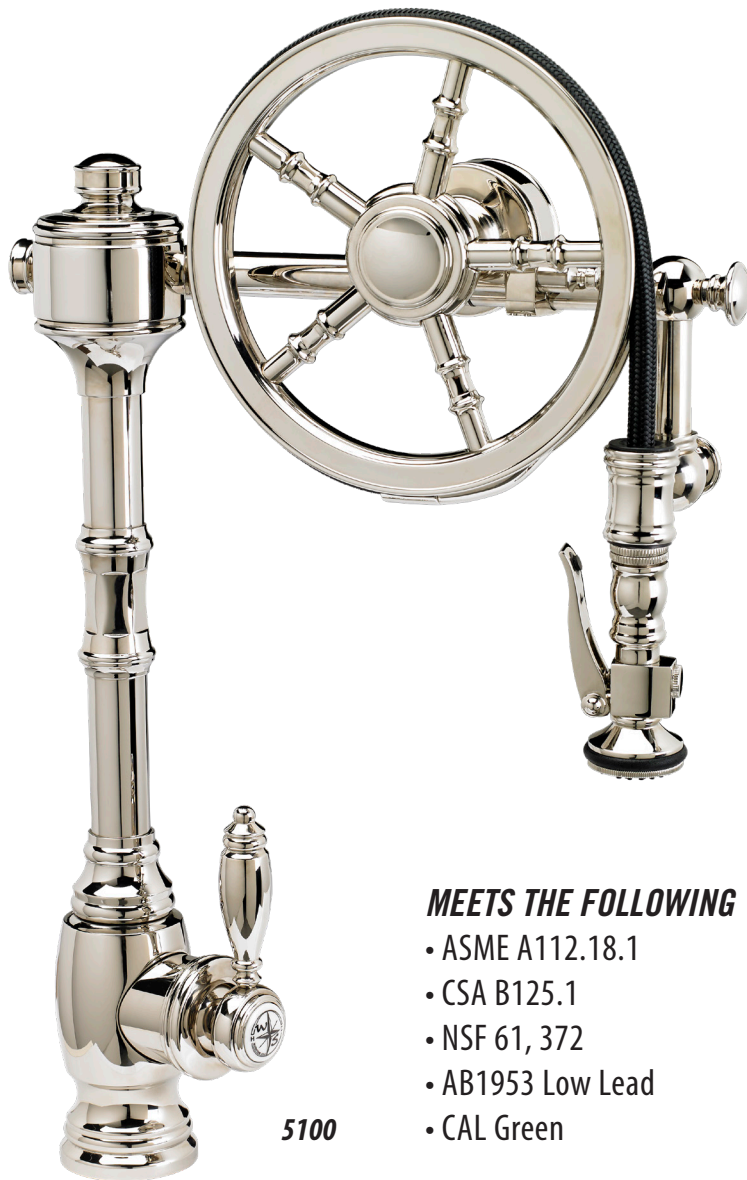

5100

### MEETS THE FOLLOWING

- ASME A112.18.1
- CSA B125.1
- NSF 61, 372
- AB1953 Low Lead
- CAL Green

### MAKE IT A SUITE!

Add accessories that match your faucet in both style and finish.



4010


4020  
4030

4055

4060

### FEATURES

- Designed, engineered and made in the USA.
- Solid brass construction.
- Available in 30 finishes.
- “Easy Pull” continuous force spring controls pull-down feel.
- Pulley braking system prevents handle snap back.
- Spray head extends 20” from spout.
- Toggle handle to spray function.
- 1.75 gpm maximum flow rate with stream selected.
- Braided connection hoses.
- Compatible with reverse osmosis filtration systems.
- 360 degree swivel spout.
- Lifetime Functional Warranty.
- Single lever control hot/cold ceramic disk valve cartridge.
- Above the countertop access for servicing.
- Control handle adjusts up to 22.5 degrees (right or left) for clearance from backsplashes.
- 3 handle buttons included. Hot/cold, cold/hot and matching finish.

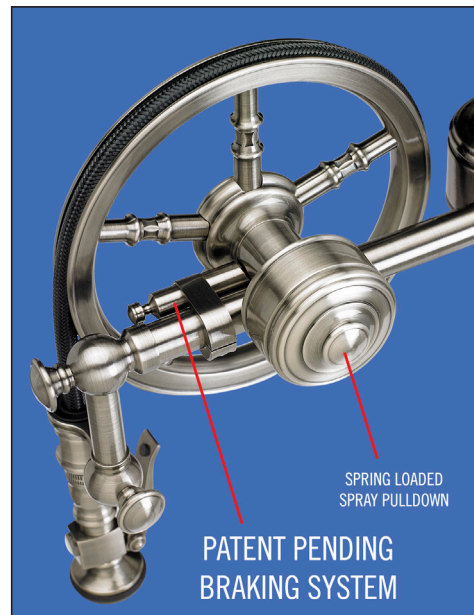

SPRING LOADED  
SPRAY PULLDOWN

PATENT PENDING  
BRAKING SYSTEM

# TRADITIONAL PLP PULLDOWN FAUCETS

Model # 5200, 5500, 5600


**NOW AVAILABLE!  
PREP SIZE  
PULLDOWNS**



1 Unique 'PLP' positive lock holds spray head in place.

2 Squeeze lever handle to switch from aerated stream to spray **during** faucet operation.

3 **RUB CLEAN** spray face for easy cleaning.

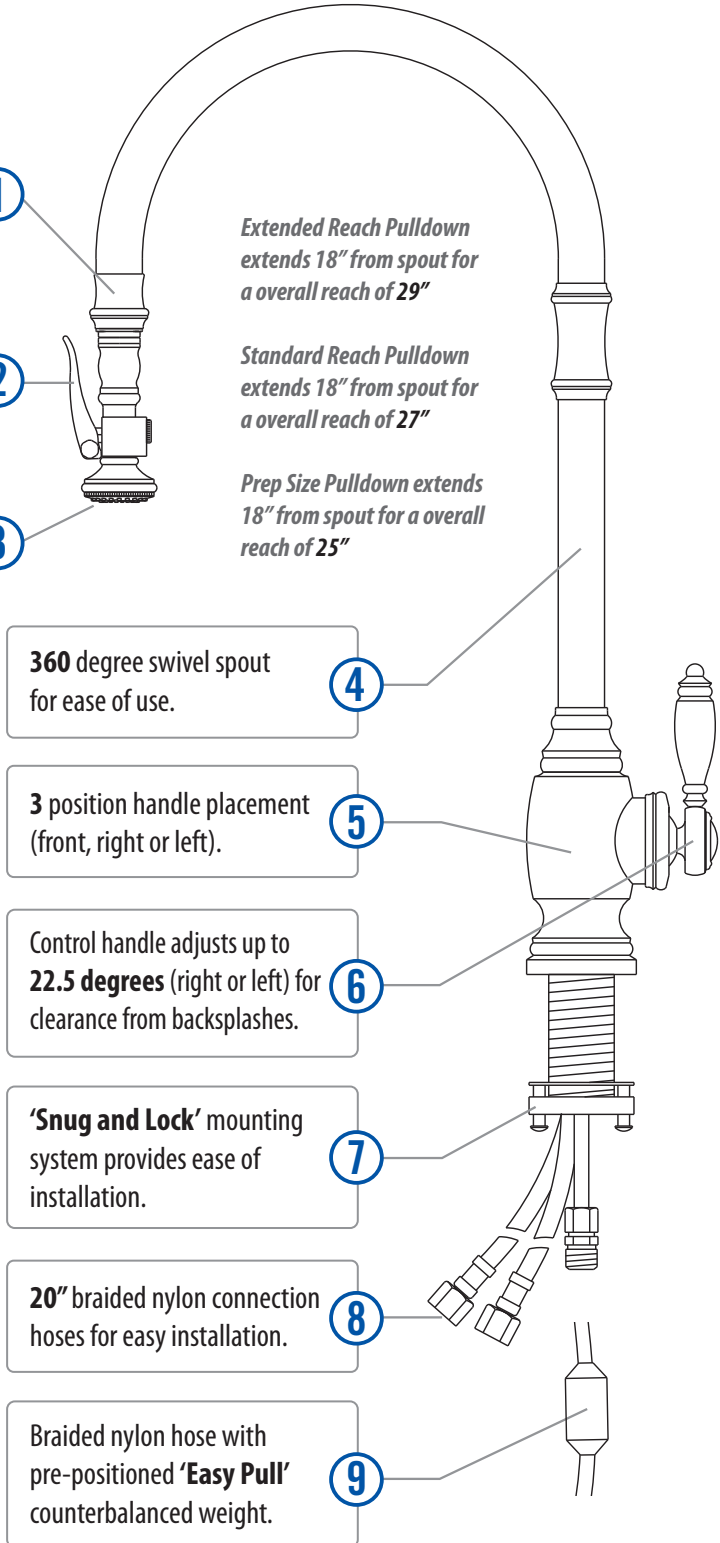

**Single Package, 2, 3 and 4  
Piece Mini-Suites Available**

# CONTEMPORARY PLP PULLDOWN FAUCETS

Model # 5300, 5400, 5700, 5800, 5900, 5930

1 Unique 'PLP' positive lock holds spray head in place.

2 Squeeze toggle handle to switch from aerated stream to spray **during** faucet operation.

3 Aerator is removable for **easy** cleaning.

5300  
5400

1 Unique 'PLP' positive lock holds spray head in place.

2 Squeeze lever handle to select spray **during** faucet operation.

3 **RUB CLEAN** spray face for easy cleaning.

5700  
5800  
5900  
5930

- *Extended Reach Pulldown extends 18" from spout for a overall reach of 29"*
- *Standard Reach Pulldown extends 18" from spout for a overall reach of 27"*
- *Prep Size Pulldown extends 18" from spout for a overall reach of 25"*

## NOW AVAILABLE! PREP SIZE PULLDOWNS



Single Package, 2, 3 and 4 Piece Mini-Suites Available

4 360 degree swivel spout for ease of use.

5 3 position handle placement (front, right or left).

6 Control handle adjusts up to **22.5 degrees** (right or left) for clearance from backsplashes.

7 'Snug and Lock' mounting system provides ease of installation.

8 20" braided nylon connection hoses for easy installation.

9 Braided nylon hose with Pre-positioned 'Easy Pull' counterbalanced weight.